


BENCHMARK 215 & 615

High Performance System
Sealant Systems

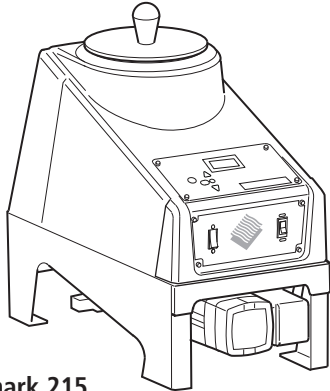


Benchmark 215

Standard Features

- ▶ Manual Standby, Auto-Standby, Auto-Off Timer
- ▶ Microprocessor Temp Control
- ▶ All Zone Temp Readouts, °F or °C
- ▶ TFE Coated Melt Tanks
- ▶ Power Cord
- ▶ Steel Gear Pumps
- ▶ High Torque AC Drive Motor
- ▶ Precision Flow Control

Common Options

- ▶ #921-011 Steel Cart

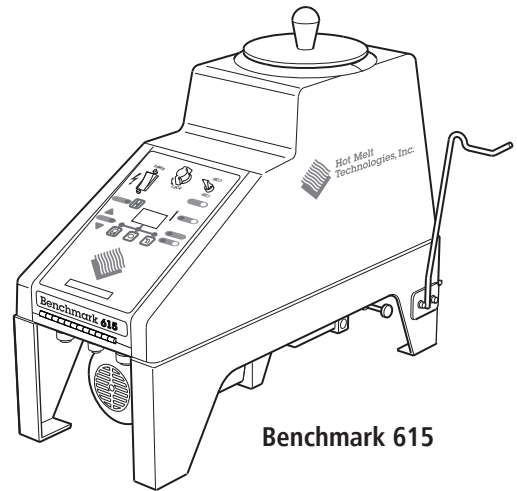


Benchmark 615

Benchmark Melt Unit 120v ▶ Use XP Prefix for 220v


DESCRIPTION	PART NUMBER P/N#	TANK CAPACITY (APPROX.)	HOSE/GUN CAPABILITY
Benchmark 215	BM215-HVR4-B	15 lbs.	1
Benchmark 615	BM615-50-M4	20 lbs.	1

Handguns 120v ▶ Use XP Prefix for 220v



CONFIGURATION	Standard Entry 
PART NUMBER #	DG-403-RS

Heated Hoses 120v ▶ Use XP Prefix for 220v

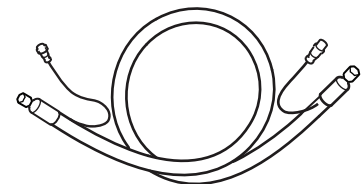

HOSE LENGTH	REGULAR HOSE P/N#
8 Ft.	DG0808-HF
12 Ft.	DG0812-HF
16 Ft.	DG0816-HF



Insulated Glass Gunning Tips Solid Brass

PART NUMBER #	ORIFICE
156-098 	Tip Seat
IG-3 	3/16" Bead
IG-4	1/4" Bead
IG-5	5/16" Bead
IG-6	3/8" Bead
IG-7	7/16" Bead
IG-8	1/2" Bead
IG-10	5/8" Bead
IG-12	3/4" Bead

Standard Bead Extrusion Nozzles

PART NUMBER #	ORIFICE
156-022 	.090
156-047 	.090

Effective Date: 1/1/2018

All prices are subject to change without notice

©2018 Hot Melt Technologies, Inc

