




## BENCHMARK® 700

High Performance System

### Standard Features

- ▶ Auto-Standby, Auto-Off Timer
- ▶ Audible Alarm
- ▶ Modular Melt Tanks
- ▶ Power Cord
- ▶ Manual Standby
- ▶ Tank Filter
- ▶ Programmable High Limit
- ▶ Pump Ready Lock-out
- ▶ On/Off Hose/Gun Zones
- ▶ Precision Flow Control
- ▶ Diagnostics
- ▶ All Zone Temp Readouts
- ▶ Temp Readout, °F or °C
- ▶ Set Lock

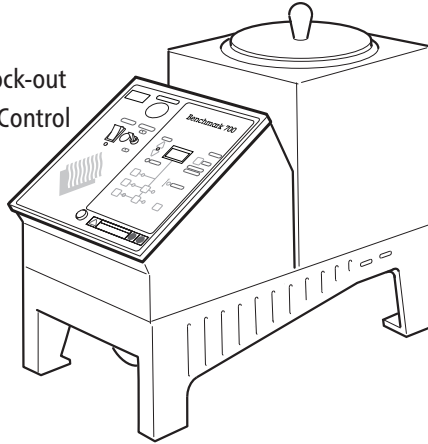

### Common Options


- ▶ #340-032 Key Lock
- ▶ #934-247 24hr./7 Day Timer
- ▶ #921-011 Steel Cart
- ▶ #910-055 Pressure Gauge
- ▶ Available in 220v
- ▶ See Load Alert Page
- ▶ #911-111 Hinged Lid, 7", Installed
- ▶ #911-112 Hinged Lid, 10", Installed

### Benchmark® Melt Unit 120v, 30 amp ▶ Use XP7xx-4 Prefix for 220v

DESCRIPTION	PART NUMBER P/N	TANK CAPACITY (APPROX.)	HOSE/GUN CAPABILITY
Benchmark® 725	BM725-3-30-M	25 lbs. (3 Gal.)	2
Benchmark® 735	BM735-3-30-M	35 lbs. (5 Gal.)	2
Benchmark® 750	BM750-3-30-M	50 lbs. (7 Gal.)	2
• HP System Control			
• 86 rpm / PA-30			
• 100° F - 475° F			

### Heated Hoses 120v ▶ Use XP Prefix for 220v

HOSE LENGTH	REGULAR HOSE P/N	SPRAY HOSE P/N
8 Ft.	DG0608-R	DG0608-S
12 Ft.	DG0612-R	DG0612-S
16 Ft.	DG0616-R	DG0616-S
20 Ft.	DG0620-R	DG0620-S

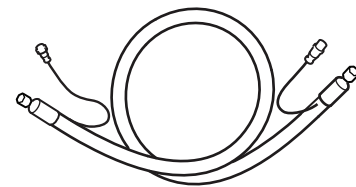

### Handguns & Automatic Guns 120v ▶ Use XP Prefix for 220v

CONFIGURATION	Standard Entry	Top Entry	In-Line	Automatic Gun
<b>PART NUMBER #</b>	DG-401-RS * DG-403-RS *	DG-403-RT *	DG-501-R * DG-503-R *	AV-600-RU

\* Handgun Swivel: 01 = Straight Swivel; 03 = Ball Swivel

▶ See Gun/Nozzle Pages for available Bead and Spray Nozzles

Effective Date: 12/12/2024  
All prices are subject to change without notice