




BENCHMARK® 650

High Performance System

I.G. Sealant System

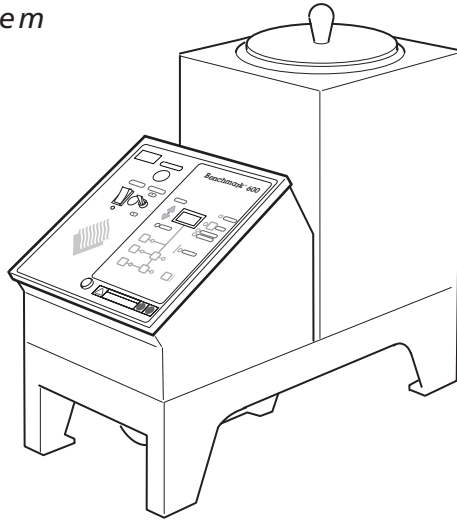

Standard Features

- ▶ Manual Standby
- ▶ Auto-Standby, Auto-Off Timer
- ▶ Microprocessor Temp Control
- ▶ All Zone Temp Readouts
- ▶ Patented Modular Melt Tanks
- ▶ Power Cord
- ▶ Hardened Steel Gear Pumps
- ▶ High Torque AC Drive Motor
- ▶ Precision Flow Control

Common Options


- ▶ #340-032 Key Lock
- ▶ #921-011 Steel Cart
- ▶ #911-112 Hinged Lid, 10", Installed
- ▶ Load Alert



Benchmark® Melt Unit 220v


DESCRIPTION	PART NUMBER P/N	TANK CAPACITY (APPROX.)	HOSE/GUN CAPABILITY
BM650	BM650-WS-F4	50 lb	1

Handguns 220v



CONFIGURATION	Standard Entry 
PART NUMBER	XP-403-RS

Heated Hoses 220v



HOSE LENGTH	REGULAR HOSE P/N
8 Ft	XP1008-HF
12 Ft	XP1012-HF
16 Ft	XP1016-HF

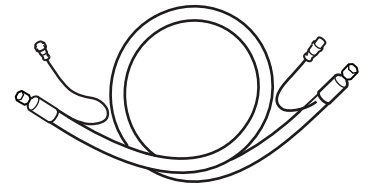

Insulated Glass Gunning Tips Solid Brass

PART NUMBER	ORIFICE
156-098 	Tip Seat
156-IG3	3/16" Bead
-IG4	1/4" Bead
-IG5	5/16" Bead
-IG6	3/8" Bead
-IG7 	7/16" Bead
-IG8	1/2" Bead
-IG10	5/8" Bead
-IG12	3/4" Bead

Standard Bead Extrusion Nozzles

PART NUMBER	ORIFICE
156-022 	.090
156-047 	.090

Effective Date: 01/06/2025
All prices are subject to change without notice