



PROFLEX® G6


Pre-Melter System 220v, 3ph

Standard Features







- ▶ Auto-Standby
- ▶ Auto-Off Timer
- ▶ Ready Delay Timer
- ▶ Manual Standby
- ▶ Set Point Limit
- ▶ Front Panel Diagnostics
- ▶ All Zone Ready
- ▶ Temp Readout, °F or °C
- ▶ ±1°F Temp Control
- ▶ Hose/Gun On/Off Control
- ▶ 1 or 2 Hose/Gun Capability
- ▶ Audible Fault Alarm
- ▶ Service Clock
- ▶ PA-50 Pump with On/Off Control
- ▶ Precision Flow Control

Common Options

- ▶ #340-032 Key Lock
- ▶ #934-247 24h/7d Timer
- ▶ #921-014 Steel Cart Assembly
- ▶ #921-017 Base Cart
- ▶ #XP-922-221 OEM Interface Cable
- ▶ #XP-922-040 Remote Motor Run Cable
- ▶ #910-135 ProFill Load Alert

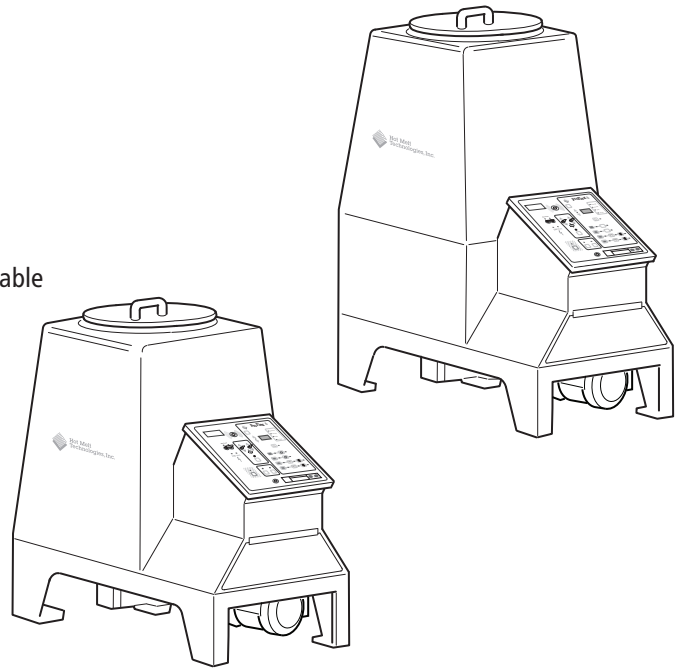

System Configuration

G6 XXX - W - X4 - X - 3P					
CONTROL PACKAGE	TANK SIZE	TANK HEATER HARNESS	MOTOR		
	135 lb 		 CONSTANT SPEED F - 113 RPM, 1/3 HP K - 170 RPM, 1/3 HP	SINGLE "1"	240v, 3ph "3P"
	200 lb 		 VARIABLE SPEED A - AC 0-125 RPM	Dual "2"	

Effective Date: 01/06/2025

All prices are subject to change without notice