

# Quick Spec Selection Guide



## PROFLEX® G5/G9 SINGLE GRID

High Performance System




220v, 1ph

### Standard Features

- ▶ Auto-Standby
- ▶ Auto-Off Timer
- ▶ Ready Delay Timer
- ▶ Manual Standby
- ▶ Set Point Limit
- ▶ Front Panel Diagnostics
- ▶ All Zone Ready
- ▶ Temp Readout, °F or °C
- ▶ ±1°F Temp Control
- ▶ Hose/Gun On/Off Control
- ▶ 2 or 4 Hose/Gun Capability
- ▶ Audible Fault Alarm
- ▶ Service Clock
- ▶ Pump On/Off Control
- ▶ Precision Flow Control

### Common Options

- ▶ #340-032 Key Lock
- ▶ #934-247 24h/7d Timer
- ▶ #921-011 Steel Cart Assembly
- ▶ #XP-922-221 OEM Interface Cable
- ▶ #XP-922-040 Remote Motor Run Cable
- ▶ #910-055 Pump Pressure Gauge
- ▶ 240v, 3ph available
- ▶ #911-111 Hinged Lid, 7", Installed
- ▶ #911-112 Hinged Lid, 10", Installed
- ▶ See Load Alert Page

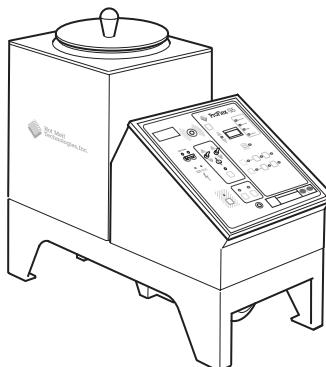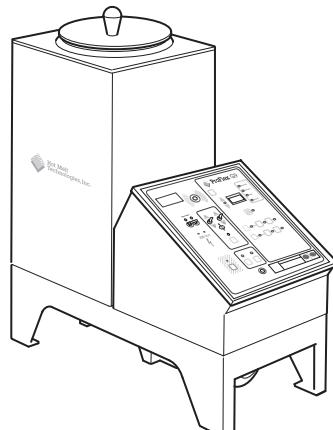

### System Configuration

GX	XX	-	X	-	40	-	X4
CONTROL PACKAGE	TANK SIZE		TANK HEATER HARNESS		PUMP		MOTOR
G5 - 2 hose/2 gun G9 - 4 hose/4 gun	17 lb		3 - 1800 W @ 220V 4 - 2400 W @ 220V		PA-40		CONSTANT SPEED
							M - 85 RPM, 1/6 HP F - 113 RPM, 1/3 HP K - 170 RPM, 1/3 HP
							VARIABLE SPEED
							A - AC 0-125 RPM

Effective Date: 01/06/2025  
All prices are subject to change without notice